


PF2.5 - Push Fit Terminals

PF Series



Electrical Ratings	
Voltage / Current / Cross Section	800V~/24A/2.5mm ²
VDE	800V~/24A/2.5mm ²
UL	600V~/20A/AWG 22-12
Connection Data	
Insulation Stripping Length	10mm
Solid Strand	0.5 - 4mm ²
Fine Strand with ferrule	0.5 - 2.5mm ²
AWG Conductor	22.....12
Technical Data	
Max. Clamping Range	0.2 - 4mm ²
Rated Impulse Voltage / Pollution Severity	8kV / 3
Insulation Material Group / Gauge Pin Code	1 / A3
Protection Class / Protection Conductor Type	IP20 / -

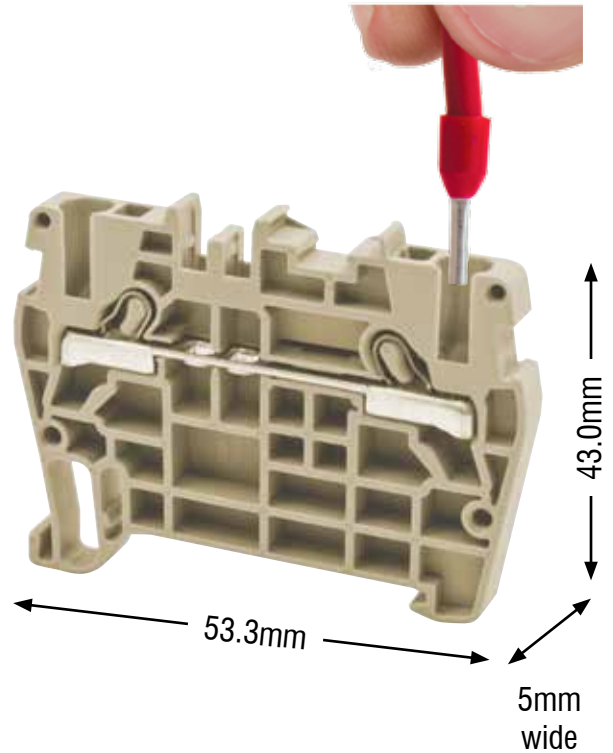

Ordering Data (Example) **PF2.5BEIGE**

Terminal Colour Options	
<input type="checkbox"/>	Beige
<input type="checkbox"/>	Grey
<input type="checkbox"/>	Black
<input type="checkbox"/>	White
<input type="checkbox"/>	Blue
<input type="checkbox"/>	Green
<input type="checkbox"/>	Red
<input type="checkbox"/>	Yellow
<input type="checkbox"/>	Orange
<input type="checkbox"/>	Brown

PF Series Accessories

Mounting Rails - DIN EN 50022	35mm DIN-Rail
End Bracket For MR35	ES1 ES4 (screwless)
End Plate Polyamide 66 - Thickness 1.2mm	EPPF 2.5
Partitions	SPPF 2.5-4
Cross Connection	CCS 2.5/2 CCS 2.5/3 CCS 2.5/4 CCS 2.5/10
Test Plug	PFT

