


PF4 - Push Fit Terminals

PF Series

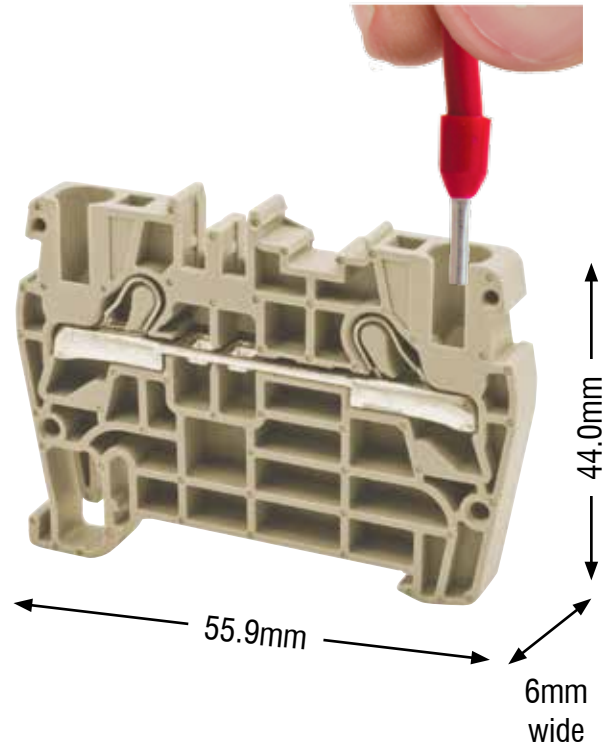

Electrical Ratings	
Voltage / Current / Cross Section	800V~/32A/4mm ²
VDE	800V~/32A/4mm ²
UL	600V~/30A/AWG 22-10
Connection Data	
Insulation Stripping Length	10mm
Solid Strand	0.5 - 6mm ²
Fine Strand with ferrule	0.5 - 4mm ²
AWG Conductor	22.....10
Technical Data	
Max. Clamping Range	0.2 - 6mm ²
Rated Impulse Voltage / Pollution Severity	8kV / 3
Insulation Material Group / Gauge Pin Code	1 / A4
Protection Class / Protection Conductor Type	IP20 / -

Ordering Data (Example) **PF4BEIGE**

Terminal Colour Options	
<input type="checkbox"/>	Beige
<input type="checkbox"/>	Grey
<input type="checkbox"/>	Black
<input type="checkbox"/>	White
<input type="checkbox"/>	Blue
<input type="checkbox"/>	Green
<input type="checkbox"/>	Red
<input type="checkbox"/>	Yellow
<input type="checkbox"/>	Orange
<input type="checkbox"/>	Brown



PF Series Accessories

Mounting Rails - DIN EN 50022	35mm DIN-Rail
End Bracket	ES1
For MR35	ES4 (screwless)
End Plate	EPPF 4
Polyamide 66 - Thickness 1.2mm	
Partitions	SPPF 2.5-4
Cross Connection	CCS 4/2
	CCS 4/3
	CCS 4/4
	CCS 4/10
Test Plug	PFT