


# PFPE2.5P - Push Fit Terminals

PFPE (Earth) Series



Electrical Ratings	
Voltage / Current / Cross Section	~V~/~A/2.5mm <sup>2</sup>
VDE	~V~/~A/2.5mm <sup>2</sup>
UL	~V~/~A/AWG 22-12
Connection Data	
Insulation Stripping Length	10mm
Solid Strand	0.5 - 4mm <sup>2</sup>
Fine Strand with ferrule	0.5 - 2.5mm <sup>2</sup>
AWG Conductor	22.....12
Technical Data	
Max. Clamping Range	0.2 - 4mm <sup>2</sup>
Rated Impulse Voltage / Pollution Severity	8kV / 3
Insulation Material Group / Gauge Pin Code	1 / A3
Protection Class / Protection Conductor Type	IP20 / PE

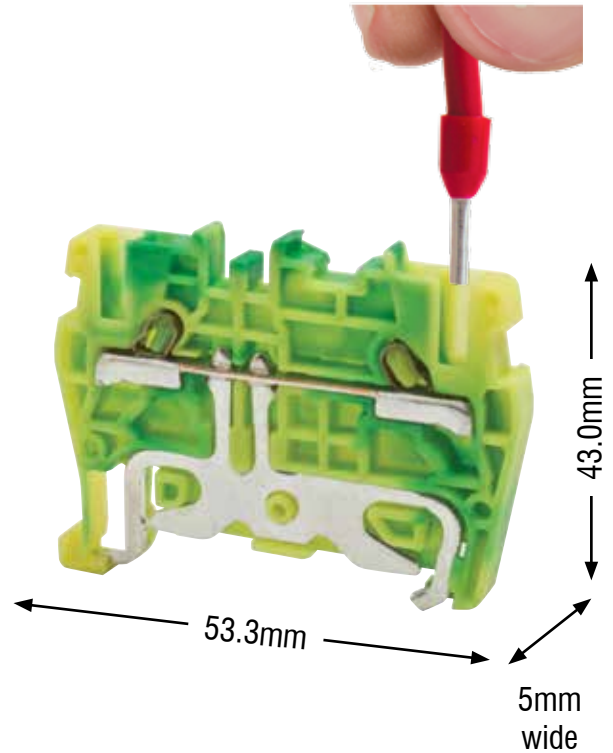

## PF Series Accessories

Ordering Data	<b>PFPE2.5P</b>
---------------	-----------------

Mounting Rails - DIN EN 50022	35mm DIN-Rail
End Bracket	ES1
For MR35	ES4 (screwless)
End Plate	EPPFPE 2.5
Polyamide 66 - Thickness 1.0mm	

