

# Relay sockets for QY relays


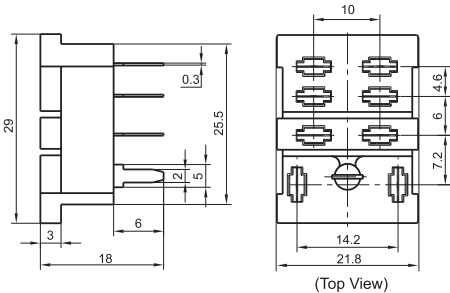







- Suitable for QY relays
- Dielectric strength 2000 VAC min.
- Two mounting types are available: PCB or DIN Rail and Screw mounting
- Components available: metallic retainer

## Characteristics

Product	Nominal Voltage	Nominal Current	Ambient Temperature	Dielectric Strength min.	Screw Torque, Nm	Wire Strip Length
SRP2-0	250VAC	10A	-40 to 70°C	2000 VAC	-	-
SRH2-C	250VAC	10A	-40 to 70°C	2000 VAC	1.0	7 mm

## Outline dimensions, Wiring diagram and PC Board layout(mm)

Socket	Outline dimensions	Wiring Diagram	PCB Layout	Components Available
<p><b>SRP2-0</b></p>  <p>PCB mounting, PCB terminal Applicable for QY relays Metallic retainers included</p>	 <p>(Top View)</p>			<p>Metallic retainer SRC-CLIP</p> 
<p><b>SRH2-C</b></p>  <p>Screw terminal DIN rail and Screw mounting Applicable for QY relays Metallic retainers x 2 included</p>	 <p>(Top View)</p>	 <p>(Top View)</p>	